

# VORTEX 2000-I



## HEPA FILTRATION AIR CLEANING DEVICE

### PRODUCT DESCRIPTION

AIRBOX Vortex 2000-I is a versatile, multi-use, industrial-grade air cleaning system which uses a 4-Stage Filtration System, including Advanced Molecular Adsorbent filtration for heavier concentrations of unwanted gases, to provide Equivalent Clean Airflow (V<sub>ACS</sub>) for indoor install types. The Vortex 2000-I can be integrated into an existing ventilation system or as an independent air cleaning system. The Vortex 2000-I utilizes a multi-stage filtration configuration designed to target and reduce high levels of airborne particulates/aerosols and molecular contaminants such as VOCs (volatile organic compounds) in commercial and industrial environments. The AIRBOX Vortex 2000-I is equipped with the AirBox Advanced Operating System (AOS) platform, which allows AIRBOX units to run on differing schedules and keeps track of actual filter life and other maintenance needs, such as the direct drive ECM Fans used for maximized efficiency. In addition, the VORTEX 2000-I qualifies the space for ASHRAE Standard 62.1 IAQP (Indoor Air Quality Procedure) by cleaning the air with recirculation, which could allow for a reduction in the amount of outdoor air required and HVAC energy if all specified Design Compounds (DCs) are maintained below their design limits specified in ASHRAE Standard 62.1.

### COMPLIANCE AND PERFORMANCE SPECIFICATIONS

ASHRAE 241-2023	Compliant*
UL Listed	Listing in Progress
IEST-RP-CC007	Certified 99.99% @ 0.3 microns HEPA Filter
US DOE-STD-3020-2015	
UL900	
Bioaerosol Testing	Available upon Request
Efficacy Testing	Available upon Request
*Compliance Testing and Certification in progress	




Vortex 2000-I

### TECHNICAL SPECIFICATIONS

Unit Size	26"H x 24"W x 63.5"L
Weight	260 lbs
Maximum Nominal Air Flow Rate	2,600 CFM
Controls	Standard manual control and AirBox Advanced Operating System (IOT) allowing for remote adjustment.
Enclosure Material and Finish	Aircraft Grade Aluminum Alloy Outside Skin with Structural Steel Frame
	Powder Coat Finish
Additional Features	Differential Pressure and TVOC sensors for concentration and filter life monitoring.
Warranty	Transferable Limited Lifetime Warranty. Lifetime Warranty on material and workmanship. 5 Year warranty on fan and motor package inclusive of electrical.


### ELECTRICAL SPECIFICATIONS

Operating Voltage	3~ 230 VAC
ECM Fan	3~ 230VAC, 50/60HZ, Ball Bearing, IP54 Rated UL Listed: File Number E319742
Connectors	Deutsch DT, IP68 Rated

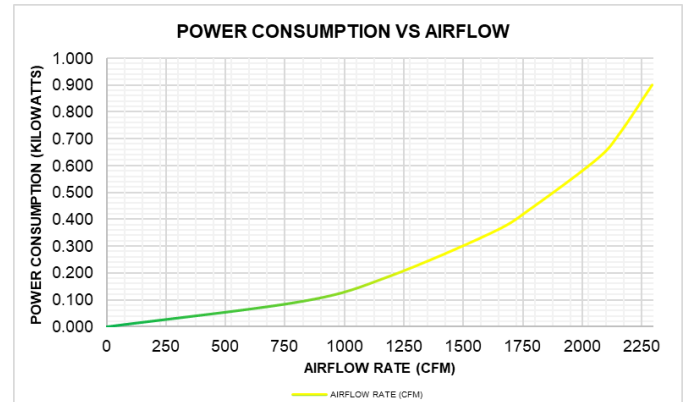

### FILTRATION SPECIFICATIONS

First Stage	<b>Antimicrobial Filter</b>
	MERV 9 4" Radial Pleated Polyester Filters treated with Microban Aegis Microbe Shield®
Second Stage	<b>Molecular Adsorbent Media Filter</b>
	Filter with Proprietary Blend of Adsorbent Media
Third Stage	<b>Antimicrobial Filter</b>
	MERV 9 4" Radial Pleated Polyester Treated with Microban Aegis Microbe Shield®
Fourth Stage	<b>HEPA Filter</b>
	Certified 99.99% Effective 12" Pleated Glass Media Treated with Microban Aegis Microbe Shield®

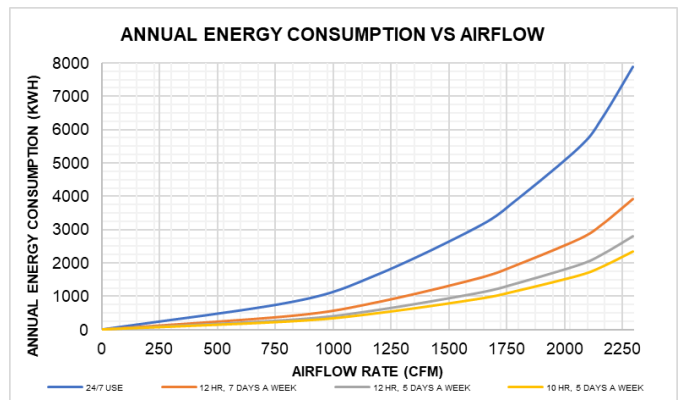

**AIRBOX is regulated by the US Environmental Protection Agency and state governments as a pesticidal device. Accordingly, our air cleaners are packaged and labeled in accordance with EPA regulations under FIFRA section 2(q)(1) and 40 CFR Part 156.**  
**EPA Registered Establishment No.: 97081-NC-1**